

United States Department of the Interior



U.S. GEOLOGICAL SURVEY

Reston, Virginia 20192

REPORT OF CALIBRATION
of Aerial Mapping Camera

October 17, 2005

Camera type:	Wild RC30*	Camera serial no.:	5318
Lens type:	Universal Aviogon /4-S	Lens serial no.:	13361
Nominal focal length:	153 mm	Maximum aperture:	f/4
		Test aperture:	f/4

Submitted by: Air Photographics, Inc.
Martinsburg, West Virginia

Reference: Air Photographics, Inc. purchase order
No. 343587, dated October 13, 2005.

These measurements were made on Agfa glass plates, 0.19 inch thick, with spectroscopic emulsion type APX Panchromatic, developed in D-19 at 68° F for 3 minutes with continuous agitation. These photographic plates were exposed on a multicollimator camera calibrator using a white light source rated at approximately 5200K.

I. Calibrated Focal Length: 153.510 mm

II. Lens Distortion

Field angle:	7.5°	15°	22.7°	30°	35°	40°
Symmetric radial (um)	-1	-1	-2	-1	0	1
Decentering (um)	0	0	1	1	2	3

Symmetric radial
distortion parameters

$$\begin{aligned} K_0 &= 0.3191 \times 10^{-4} \\ K_1 &= -0.1862 \times 10^{-8} \\ K_2 &= -0.4489 \times 10^{-13} \\ K_3 &= 0.0000 \\ K_4 &= 0.0000 \end{aligned}$$

Decentering
distortion parameters

$$\begin{aligned} P_1 &= 0.1221 \times 10^{-6} \\ P_2 &= -0.1358 \times 10^{-6} \\ P_3 &= 0.0000 \\ P_4 &= 0.0000 \end{aligned}$$

Calibrated
principal point

$$\begin{aligned} x_p &= -0.007 \text{ mm} \\ y_p &= 0.003 \text{ mm} \end{aligned}$$

The values and parameters for Calibrated Focal Length (CFL), Symmetric Radial Distortion (K_0, K_1, K_2, K_3, K_4), Decentering Distortion (P_1, P_2, P_3, P_4), and Calibrated Principal Point [point of symmetry] (x_p, y_p) were determined through a least-squares Simultaneous Multiframe Analytical Calibration (SMAC) adjustment. The x and y-coordinate measurements utilized in the adjustment of the above parameters have a standard deviation (σ) of ± 3 microns.

* Equipped with Forward Motion Compensation

III. Lens Resolving Power in cycles/mm

Area-weighted average resolution: 109

Field angle:	0°	7.5°	15°	22.7°	30°	35°	40°
Radial Lines	134	159	134	134	113	95	95
Tangential lines	134	134	113	113	113	95	80

The resolving power is obtained by photographing a series of test bars and examining the resultant image with appropriate magnification to find the spatial frequency of the finest pattern in which the bars can be counted with reasonable confidence. The series of patterns has spatial frequencies from 5 to 268 cycles/mm in a geometric series having a ratio of the 4th root of 2. Radial lines are parallel to a radius from the center of the field, and tangential lines are perpendicular to a radius.

IV. Filter Parallelism

The two surfaces of the Wild 525 filter No. 7722 accompanying this camera are within 10 seconds of being parallel. This filter was used for the calibration.

V. Shutter Calibration

Indicated time (sec)	Rise time (μ sec)	Fall Time (μ sec)	$\frac{1}{2}$ width time (ms)	Nom. Speed (sec.)	Efficiency (%)
1/125	1675	1686	8.17	1/140	87
1/250	865	870	4.26	1/270	87
1/500	447	443	2.16	1/530	87
1/1000	216	217	1.09	1/1040	87


The effective exposure times were determined with the lens at aperture f/4. The method is considered accurate within 3 percent. The technique used is described in International Standard ISO 516:1999(E).

VI. Film Platen

The film platen mounted in Wild RC30 drive unit No. 5318-700 does not depart from a true plane by more than 13 μ m (0.0005 in).

This camera is equipped with a platen identification marker that will register "700" in the data strip area for each exposure.

VII. Principal Points and Fiducial Coordinates

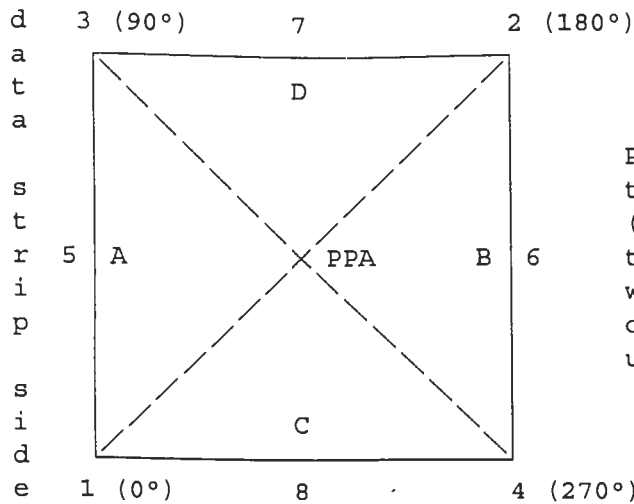

Positions of all points are referenced to the principal point of autocollimation (PPA) as origin. The diagram indicates the orientation of the reference points when the camera is viewed from the back, or a contact positive with the emulsion up. The data strip is to the left.

	<u>X coordinate</u>	<u>Y coordinate</u>
Indicated principal point, corner fiducials	0.014 mm	0.005 mm
Indicated principal point, midside fiducials	0.014	0.004
Principal point of autocollimation (PPA)	0.0	0.0
Calibrated principal point (pt. of sym.) x_p, y_p	-0.007	0.003

Fiducial Marks

1	-105.989 mm	-105.995 mm
2	106.019	106.006
3	-105.977	106.003
4	106.007	-105.995
5	-111.981	0.003
6	112.015	0.005
7	0.020	112.006
8	0.007	-111.994

VIII. Distances Between Fiducial Marks

Corner fiducials (diagonals)

1-2: 299.820 mm 3-4: 299.801 mm

Lines joining these markers intersect at an angle of 89° 59' 57"

Midside fiducials

5-6: 223.997 mm 7-8: 224.000 mm

Lines joining these markers intersect at an angle of 89° 59' 46"

Corner fiducials (perimeter)

1-3: 211.998 mm 2-3: 211.996 mm

1-4: 211.996 mm 2-4: 212.001 mm

The method of measuring these distances is considered accurate within 0.003 mm

Note: For GPS applications, the nominal entrance pupil distance from the focal plane is 277 mm.


IX. Stereomodel Flatness

FMC Drive Unit No.: 5318-700

Base/Height ratio: 0.6

Platen ID: 700

Maximum angle of field tested: 40°

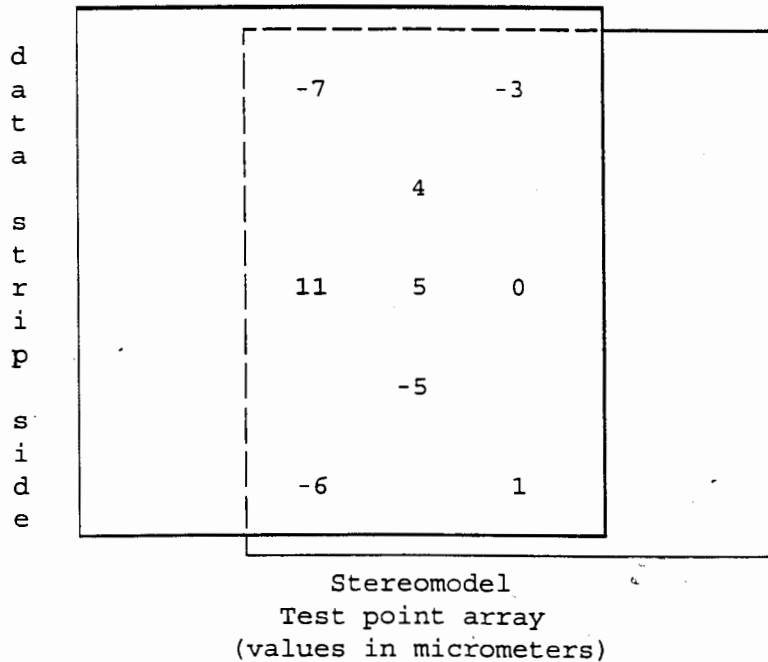

The values shown on the diagram are the average departures from flatness (at negative scale) for two computer-simulated stereo models. The values are based on comparator measurements on Kodak 4425 copy film made from Kodak 2405 film exposures. These measurements are considered accurate to within 5 μ m.

X. System Resolving Power on film in cycles/mm

Area-weighted average resolution: 53

Film: Type 2405

Field angle:	0°	7.5°	15°	22.7°	30°	35°	40°
Radial Lines	57	57	57	57	57	48	48
Tangential lines	57	57	57	57	57	48	40

This aerial mapping camera calibration report supersedes the previously issued USGS Report No. OSL/2851, dated August 2, 2002.

Gregory L. Stensaas
Remote Sensing Technologies Project Manager
Geography Discipline